



UBA 优霸精密计量泵




UBA 气动旋转阀泵

- P-R 系列气动旋转阀型计量泵，采用精密的陶瓷旋转阀设计，适合用于各种中高粘度或者是含颗粒的液体定量注液。
- 千分尺容量微分头和整体内置配装的速度控制器，能精准控制注液量和注液速度，实现在各种条件要求下的定量注液。
- 该系列的计量泵具有极高的计量精度和重复一致性；精度优于正负千分之五。
- 标准泵型全 316 不锈钢的结构，泵的所有零件都有更好的耐腐蚀性。
- P4-R 系列配备特别设计的电气联控系统，配合气控传感器，注液完成自动回程。专利设计的内置速度控制单元，整机更紧凑，泵的整体高度减小，方便料桶安装。可靠的气控阀，没有气阀泄漏的烦恼。泵主体与旋转驱动体之间只有 3 条气管。
- 对含大颗粒流体和酱料以及大流量膏体灌装，我们可提供特别的 120° 旋转阀结构泵，旋转阀通道达 25MM 通径。

P1-R / P2-R 系列

应用：碱性电池锌膏、凡士林、酱料、液态焊锡、睫毛膏、唇膏、黄油、验血管胶料、硅油、农药等

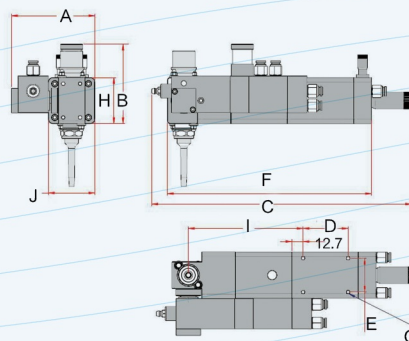

型号 Model	柱塞直径 Plunger Dia	行程 Stroke	注液量范围 Dispensing Vol	循环速度 Cycle Rate	耗气量 Air Consumption	外形尺寸 (MM) Dimension (MM)										重量 (KG) Weight (KG)
	MM	MM	ML	次 / 分钟 CCP	升 / 分钟 L/Min	A	B	C	D	E	F	G	H	I	J	
P1-R03	4.7	12.7	0-0.23	0-80	12.5	45	80	247	42.7	17.5	32	8-32	45	106	87.2	3.3
P1-R05	7.9		0-0.63													
P1-R07	11.1		0-1.2													
P1-R10	15.9		0-2.5													
P2-R10	15.9		0-5.0													
P2-R12	19.1	25.4	0-7.2	0-60	23.5	52	90	293	63.5	12.7	38	8-32	52	129.5	64.2	4.2
P2-R14	22.2		0-9.8													
P2-R17	27.0		0-14.5													
P2-R20	31.8		0-20.1													

UBA Pneumatic Rotary Valve Pump

The UBA Rotary Valve Style Dispensing Pumps are designed for dispensing medium to high viscosity liquid, gel or the liquid contain particles.


Precise micrometer volume adjustment and built-in speed control system ensures dispensing accuracy and plunger motion speed control, by which the pumps are suitable for different working condition. Typical accuracy is within ± 0.5 .

Complete 316 stainless steel pump construction. All pump parts have better rot-proof performance compared with imported pumps, especially on Li-Ion electrolyte application.



P4-R series pumps have special pneumatic-electric control unit with forward position sensor. The plunger may return automatically after complete dispensing stroke. Patent build-in speed control unit makes the pump more compact. Reliable pneumatic-electric valve ensure no air leakage.

Application: Zinc-Gel of Alkaline Battery, Vaseline, Gel, Liquid Stannum, Mascara, Lipstick, Grease, Silicone Oil, Blood Testor, Pesticide and more.....

P3-R / P4-R 系列



P4-R

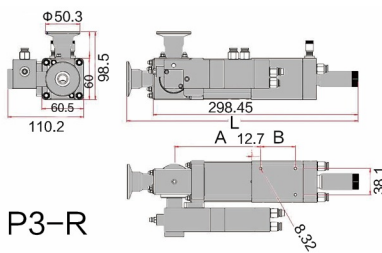

P3-R

型号 Model	柱塞直径 Plunger Dia	行程 Stroke	注液量范围 Dispensing Vol	循环速度 Cycle Rate	耗气量 Air Consumption	外形尺寸 (MM) Dimension (MM)			重量 (KG) Weight (KG)
	MM	MM	ML	次 / 分钟 CCP	升 / 分钟 L/Min	A	B	L	
P3-R20	31.8	38.1	0-30	0-70	40	125	50.8	337	6.5
P3-R26	41.3		0-50						
P4-1-R34	54.0	25.4	0-58	0-150	51	137.7	31.75	338.6	8.8
P4-2-R34	54.0	50.8	0-116	0-120	85	166.3	50.8	414.8	9.5
P4-3-R34	54.0	76.2	0-174	0-90	102	204.4	50.8	491	10.3
P4-4-R34	54.0	114.3	0-261	0-60	115	242.3	50.8	516.4	11.5